

Technical datasheet

HYDRAULIC HOSE for "OTG.FILTERUNIT.9001-2-105-9000455.SR"

Introduction


Steel reinforced synthetic rubber hydraulic hose for fuel and lube oil installation, air, and water.
For heavy-duty applications, specific installations with severe abrasion conditions.

Materials:

Tube: Oil resistant synthetic rubber.

Cover: Synthetic rubber with high ozone, abrasion, weather and heat resistance.

Reinforcement: One high tensile steel braid.

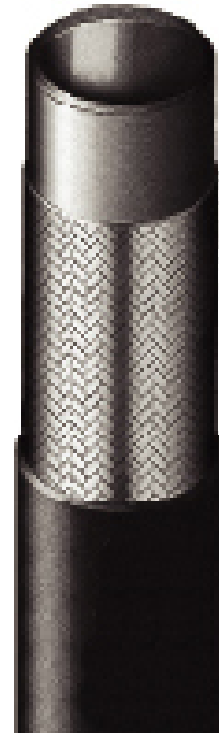

OTW item number.: 7000000-02

Features

- Universal in use
- Can be fitted with most hose couplings

Safety features

- Steel braided
- Weather and heat resistance
- Safety factor x4,75 of work pressure

Capacity & performance

Working pressure	105 bar
Blasting pressure	500 bar
Working temperature	-40°C - +100°C

Weight & dimensions

Length standard	3000 mm
Inner diameter	19 mm
Outer diameter	27,3 mm
Weight per meter	0,6 kg